


## EX-KEM 50/63

Ex-enlargement adaptor, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

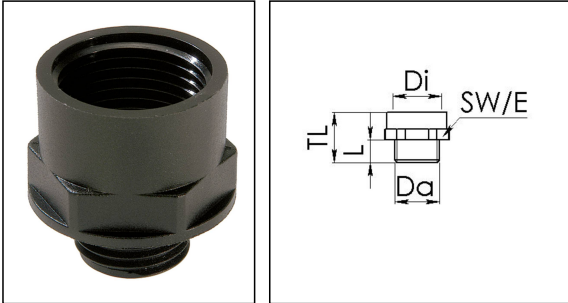

<b>Material</b>	Polyamide, fibre reinforced
<b>Temp. range min</b>	-20 °C
<b>Temp. range max</b>	70 °C
<b>Protection class</b>	IP 66
<b>Marking</b>	II 2 G Ex e II, II 2 D Ex tD A21 IP 66
<b>Approval</b>	PTB 04 ATEX 1040 X
<b>Thread type outer</b>	M
<b>Lead outer</b>	1,5
<b>Length screw-in thread L</b>	14 mm
<b>Thread type inner</b>	M
<b>Ø inner thread</b>	63
<b>Lead inner</b>	1,5
<b>Length internal thread</b>	15,5 mm
<b>Key width SW</b>	68 mm
<b>Collar diameter (E)</b>	75 mm
<b>Total length TL</b>	32 mm
<b>Form</b>	A
<b>Order no. RAL 9005</b>	10064747
<b>Type</b>	EX-KEM 50/63
<b>Packing unit</b>	5
<b>ETIM-Classification</b>	EC000938

Recommended accessories

23.06.2016

