


EX-APM 13,5/20

Ex-adaptor, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

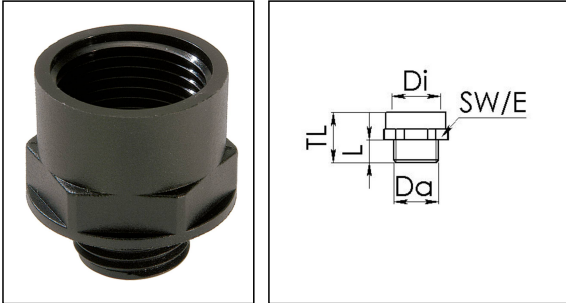

Material	Polyamide, fibre reinforced
Temp. range min	-20 °C
Temp. range max	70 °C
Protection class	IP 66
Marking	II 2 G Ex e II, II 2 D Ex tD A21 IP 66
Approval	PTB 04 ATEX 1040 X
Thread type outer	PG
Ø outer thread	13,5
Length screw-in thread L	10 mm
Thread type inner	M
Ø inner thread	20
Lead inner	1,5
Length internal thread	15,5 mm
Key width SW	24 mm
Collar diameter (E)	27 mm
Total length TL	28 mm
Form	A
Product Color	RAL 9005
Order no. RAL 9005	10064757
Type	EX-APM 13,5/20
Packing unit	25
ETIM-Classification	EC000938

Recommended accessories

MUG 13,5

10060683

23.06.2016

