



CL-6016

Type: Emergency luminaire
Mounting: Ceiling, wall
Light source: 50.000h operational time, 6000K color temperature
Luminous flux: 604 lm
Warranty: 2-years replacement warranty
Housing color and material: White, plastic
Dimensions: 337mm x 170mm x 62mm
Cable connection: Max. 2.5mm² cross-section solid or sleeved twisted wire
Operating mode: Non-maintained
Constant nominal ambient temperature range: 0°C < T_a < 45°C



PRODUCT NAME	SYSTEM TYPE	MAIN SUPPLY	INPUT CURRENT	BATTERY TYPE/TIME	PRODUCT CODE
CL-6016 Slave/Con/MB	Conventional main battery	AC 120-240V	21mA	NIMH 600mA 1 h	300182
CL-6016 Slave/Con/MB	Conventional main battery	AC 120-240V	21mA	NIMH 2400mA 3 h	300252
CL-6016 Slave/Con/CB ACAC	Conventional central battery	AC 120-240V	31mA	-	300221
CL-6016 Slave/Con/CB ACDC	Conventional central battery	AC/DC 120-240V	31mA	-	300240
CL-6016 Slave/Con/CB/24V	Conventional central battery	DC 24-32V	235mA	-	300331
CL-6016 Slave/MB	Addressable main battery	AC 120-240V	21mA	NIMH 600mA 1 h	300181
CL-6016 Slave/MB	Addressable main battery	AC 120-240V	21mA	NIMH 2400mA 3 h	300245
CL-6016 Slave/RF/MB	Addressable wireless main battery	AC 120-240V	21mA	NIMH 600mA 1 h	
CL-6016 Slave/RF/MB	Addressable wireless main battery	AC 120-240V	21mA	NIMH 2400mA 3 h	
CL-6016 Slave/CB 24V	Addressable central battery	DC 24-32V	235mA	-	300275
CL-6016 Slave/CB	Addressable central battery	AC 120-240V	31mA	-	300183
CL-6016 Slave/CB AC-DC	Addressable central battery	AC/DC 120-240V	31mA	-	

Thanks to IP65 protection it is suitable in dry and wet locations (rest room, cellar, garage, outside, etc.) and for outdoor use as well.

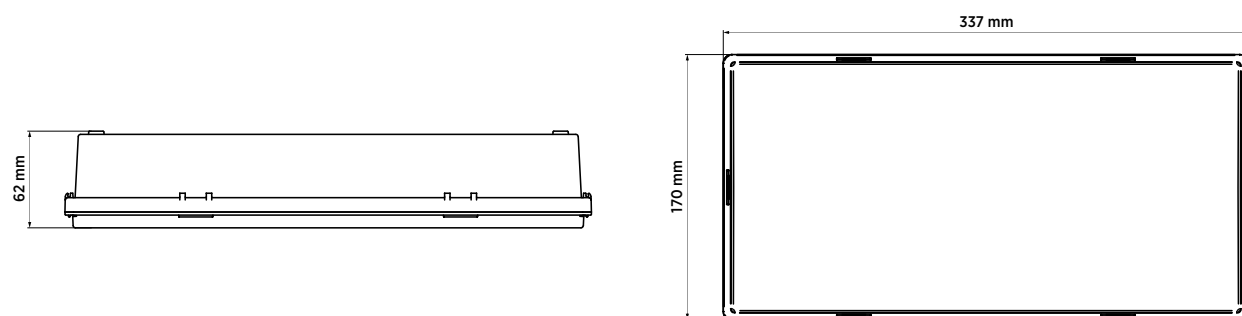

CL-8016

Type: Emergency luminaire
Mounting: Ceiling, wall
Light source: 50.000h operational time, 6000K color temperature
Luminous flux: 591 lm
Warranty: 2-years replacement warranty
Housing color and material: White, plastic
Dimensions: 314mm x 188mm x 72mm
Cable connection: Max. 2.5mm² cross-section solid or sleeved twisted wire
Operating mode: Non-maintained
Constant nominal ambient temperature range: 0°C < T_a < 45°C



PRODUCT NAME	SYSTEM TYPE	MAIN SUPPLY	INPUT CURRENT	BATTERY TYPE/TIME	PRODUCT CODE
CL-8016 Slave/Con/MB	Conventional main battery	AC 120-240V	21mA	NIMH 600mA 1 hour	
CL-8016 Slave/Con/MB	Conventional main battery	AC 120-240V	21mA	NIMH 2400mA 3 h	
CL-8016 Slave/Con/CB ACAC	Conventional central battery	AC 120-240V	31mA	-	
CL-8016 Slave/Con/CB ACDC	Conventional central battery	AC/DC 120-240V	31mA	-	
CL-8016 Slave/Con/CB/24V	Conventional central battery	DC 24-32V	235mA	-	
CL-8016 Slave/MB	Addressable main battery	AC 120-240V	21mA	NIMH 600mA 1 h	
CL-8016 Slave/MB	Addressable main battery	AC 120-240V	21mA	NIMH 2400mA 3 h	
CL-8016 Slave/RF/MB	Addressable wireless main battery	AC 120-240V	21mA	NIMH 600mA 1	
CL-8016 Slave/RF/MB	Addressable wireless main battery	AC 120-240V	21mA	NIMH 2400mA 3 h	
CL-8016 Slave/CB 24V	Addressable central battery	DC 24-32V	235mA	-	
CL-8016 Slave/CB	Addressable central battery	AC 120-240V	31mA	-	
CL-8016 Slave/CB AC-DC	Addressable central battery	AC/DC 120-240V	31mA	-	

Thanks to IP65 protection it is suitable in dry and wet locations (rest room, cellar, garage, outside, etc.) and for outdoor use as well.

