



Acciaio Eco LED


ACCIAIO REG 2X18W S600 4K

Order code **A218RD**

EAN 8002219883513

Technical specifications

Absorbed Power	34 W, 29 W, 24 W, 19 W
Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Ambient temperature (min)	-20 °C
Ambient temperature (max)	40 °C
Insulation class	I
CCT light tone	4000 K
Photobiological risk	RG0
Colour consistency	SDCM3
CRI color rendering	>80
Driver type	RD
Ballast	For constant current LED
Efficiency	147 lm/W, 152 lm/W, 160 lm/W, 162 lm/W
Energy class	D
Equivalent power	2x18w
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Glow wire strength	850 °C - 30s.
Inrush current	16 A
Inrush time	0.17
Luminaire flux	5000 lm, 4400 lm, 3850 lm, 3080 lm
Mounting	Ceiling
Breaker B10 (Qty max)	33
Breaker B16 (Qty max)	54
Breaker C10 (Qty max)	56
Breaker C16 (Qty max)	90
THD	20
Voltage supply range (max)	265 V
Voltage supply range (min)	93 V

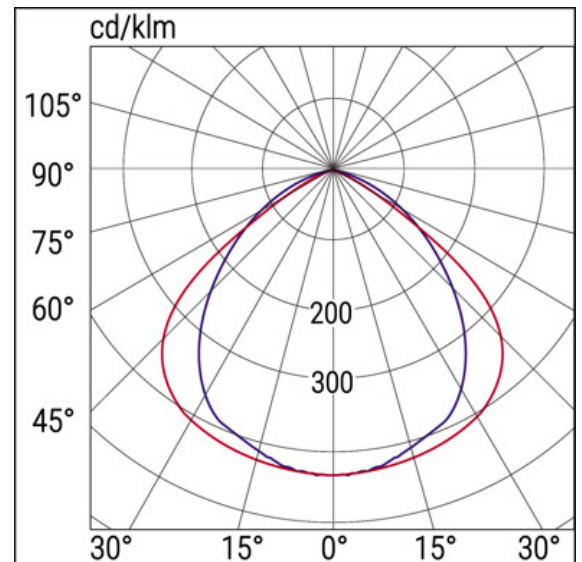

Installation and applications

Environment	Secondary Areas
Application	Production, Warehouses , Industrial Areas

Mechanical specifications


Height	90 mm
Length	667 mm
Width	108 mm
Body material	Sheet steel epoxy coated

Colour housing	Grey RAL 7035
Cover material	Tempered microprismatic glass
Reflector material	Specular Aluminium
Protection grade IP	IP66
Protection grade IK	IK09

Certifications and norms

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-1:1989, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020, EN IEC 61000-3-2 :2019


Accessories



20122
STAFFA ORIENTABILE ACC E
LED



15018
KIT ATEX ACCIAIO ECO



3905
GRIGLIA ILLUM 685X182X110



15019
RACCORDO DOPPIO INGRESSO
M20

Inverter accessories



19371
INV P&L LED SE/SA 3H 60-180V



19367
INV P&L LED SE/SA 1H 60-180V