


LED panel

MODUS FIT4000, LED panel, rectangle C, modul 600, microprizma, LED 840, driver 900mA

Code: FIT4000C4KN600/ND
EAN: 8596099038304

This product contains a light source with energy efficiency class C

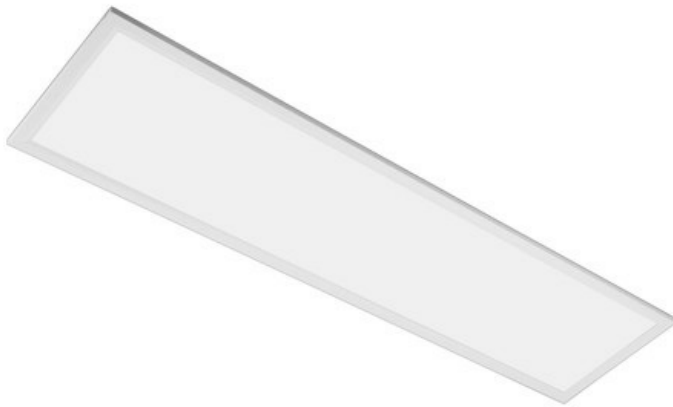

Luminaire properties

| | | | |
|---------------------------------|----------------------------------|-------------------------------|------------------|
| Product category: | Ceiling / wall luminaires | Effective luminous flux (lm): | 4200 |
| System power (W): | 35 | Luminaire efficacy (lm/W): | 120 |
| Rated lifetime L80/B50 (h): | 80000 | Degree of protection (IP): | IP40 |
| Color housing: | White | Material housing: | Aluminium |
| Light source included: | Yes | | |
| Suitable for built-in mounting: | Yes | | |
| Made in Czech republic: | Yes | Degree of protection II (IP): | IP20 |

Light source

| | | | |
|----------------------------|----------------------|--------------------------|-----------------------------------------------------|
| Light source type: | LED | Color temperature (K): | 4000 |
| Color rendering index CRI: | 80-89 | Replaceability: | Removeable light source, replaceable ballast |
| Light source type: | 1991820184002 | Energy efficiency class: | C |

Optical system

| | | | |
|--------------------------|----------------------------|----------------------------|------------------|
| Optical system: | KN | Light outlet: | Direct |
| Anti-glare limiting UGR: | 19 | Light sharing: | Symmetric |
| Material cover: | Plastic, structured | Fit for monitor workplace: | Yes |

Dimensions

| | | | |
|--------------------|-------------|-----------------------------|------------|
| Length (mm): | 1196 | Width (mm): | 296 |
| Height/depth (mm): | 15 | Built-in height/depth (mm): | 15 |
| Raster (mm): | 600 | Size version: | M |
| Weight (kg): | 3,5 | | |

Electrical values

| | | | |
|------------------------|----------------------------------------------------|----------------------|------------------|
| Protection class: | II | Voltage type: | AC |
| Type of control gear: | LED operating device current-controlled | Nominal voltage (V): | 220...240 |
| Control gear included: | Yes | No dim function: | Yes |