



Connection Clamp

acc. to DIN EN 60998 with mounting holes

119.G

EAN Code: 4011126003123  
Smallest packaging unit: 100 pcs.

the photorealistic images are to be considered as reference images

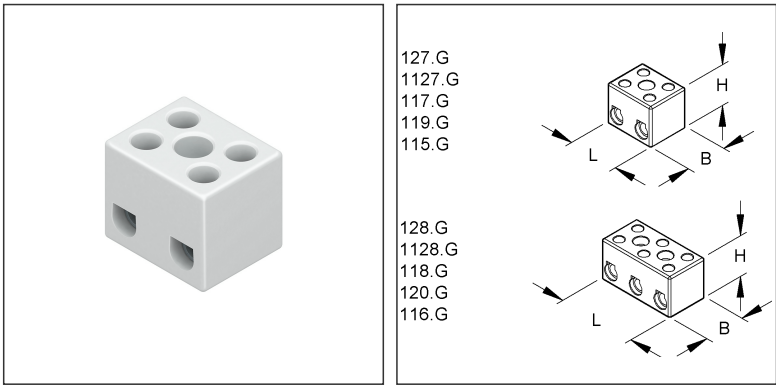

Article Description

Connection clamp, clamping range, 1,5-10,0 mm<sup>2</sup>, 2 poles, electrotechnical porcelain, colour white, with mounting holes

Additional Price Information

|               |      |
|---------------|------|
| Article group | K308 |
| quantity unit | pcs. |

Weight

|                          |                   |
|--------------------------|-------------------|
| Weight per quantity unit | 22 g / pcs.       |
| Weight in kg per 100     | 2,13 kg / 100pcs. |

# Technical Datasheet

## Clamps

119.G

the photorealistic images are to be considered as reference images

### Physical Article Dimensions

|              |          |
|--------------|----------|
| Height       | 19.50 mm |
| Width        | 20.00 mm |
| Depth/length | 23.00 mm |

### Packing Dimension

|                          |           |                                     |                      |        |          |
|--------------------------|-----------|-------------------------------------|----------------------|--------|----------|
| <b>1 piece = 1 piece</b> |           | ✓ VP1-smallest packaging unit ( PU) |                      |        |          |
| Lenght                   | 23.00 mm  | Width                               | 20.00 mm             | Height | 20.00 mm |
| Gross weight             | 0,02 kg   | Volume                              | 0,000 m <sup>3</sup> |        |          |
| Min. quantity            | 1.00 pcs. | Max. Quantity                       | 1.00 pcs.            |        |          |

|                       |             |                    |                      |        |          |
|-----------------------|-------------|--------------------|----------------------|--------|----------|
| <b>100 pieces = 1</b> |             | ✓ VP2-preferred PU |                      |        |          |
| Lenght                | 100.00 mm   | Width              | 60.00 mm             | Height | 80.00 mm |
| Gross weight          | 2,13 kg     | Volume             | 0,000 m <sup>3</sup> |        |          |
| Min. Quantity         | 100.00 pcs. | Max. Quantity      | 100.00 pcs.          |        |          |

### Tender Text

Connection terminal according to DIN EN 60998, with fixing holes, halogen-free.  
 The terminal must be fixed in position.  
 Dimensions (approx. Dimensions)  
 H x W x L : 19.5 x 20 x 23 mm  
 Clamping range solid, rigid : 1.5 - 10.0 mm<sup>2</sup>  
 Clamping range flexible : 1.5 - 6.0 mm<sup>2</sup>  
 Connection options solid, rigid : 3 x 1.5 mm<sup>2</sup>, 2 x 2.5 mm<sup>2</sup>, 1 x 4.0 mm<sup>2</sup>, 1 x 6.0 mm<sup>2</sup>, 1 x 10.0 mm<sup>2</sup>  
 Connection options flexible : 3 x 1.5 mm<sup>2</sup>, 2 x 2.5 mm<sup>2</sup>, 1 x 4.0 mm<sup>2</sup>, 1 x 6.0 mm<sup>2</sup>  
 Poles : 2  
 Material insulating part : porcelain, glazed  
 Material clamping bolt : brass  
 Material clamping screws : galvanised steel  
 Max. Ambient temperature : 200°C  
 Nominal voltage : 450 V  
 Colour : white  
 Kleinhuis Model-No. : 119.G  
 EP Material \_\_\_\_\_ EP Wage \_\_\_\_\_  
 Unit price/piece

### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 04.02.2026  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

### Origin & International Trade

|                       |          |
|-----------------------|----------|
| Country of origin     |          |
| Customs tariff number | 85369010 |