

GENNIUS

Technical datasheet


Emergency Lighting
Ref. GE-200L



UNE 60598-2-22
230V 50/60HZ

Emergency Lighting: GENNIUS. Reference: GE-200L, manufactured by Normalux. Lumens 200 lm. Autonomy (h) 1h. Operating mode: Non Maintained. Installation: Surface Mounting. Light source: Led. Battery of: Ni-Cd 3.6V/750mAh. IP: 68. IK: 09. Version: Standard. Color: White. Casing: Self-Extinguishing ABS+PC. Voltage: 230V 50/60Hz. Dimensions (mm): 313 x 160 x 59 mm. Manufactured according UNE 60598-2-22 regulations. Compatible with S-TE remote control.

Dimensions (mm):

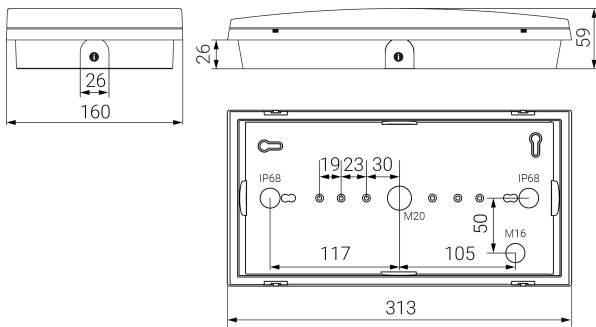

● Prensaestopa M20 (no incluido)
Cable gland M20 (not included)

Lumens	200 lm
Color temperatures (K)	5700
Light source	Led
Autonomy (h)	1h
Battery	Ni-Cd 3.6V/750mAh
Power (W)	1W
Operating mode	Non Maintained
Class	II
IP	68
IK	09
Operating temperature (°C)	5 to 35
Remote control	Yes

Photometric data:

