

PRODUCT FAMILY DATASHEET

LED VALUE CLASSIC B

LED lamps, classic mini-candle shape



AREAS OF APPLICATION

- General illumination
- Domestic applications
- Chandeliers
- Outdoor applications only in suitable luminaires

PRODUCT BENEFITS

- Lower thermal output (compared with the standard reference product)
- Very low energy consumption
- Shockproof and vibration-proof thanks to LED technology
- No UV and near-IR radiation in the light beam
- Instant 100 % light, no warm-up time
- Simple direct replacement for conventional incandescent lamps

PRODUCT FEATURES

- Professional LED lamps for line voltage
- Not suitable for use with dimmers
- Good color rendering ($R_a \geq 80$) and color stability throughout the life of the lamp
- Mercury-free lamps




TECHNICAL DATA

Product description	Electrical data		Photometrical data							Light technical data	Dimensions & weight
	Nominal wattage	Nominal voltage	Rated luminous flux	Color temperature	Lumen main.fact.at end of nom.life time	Light color (designation)	Color temperature	Luminous flux	Color rendering index Ra	Warm-up time (60 %)	Overall length
VALUE CLAS B 25 3.3 W/2700 K E14 ¹⁾	3.30 W	220...240 V	250 lm	2700 K	0.70	Warm White	2700 K	250 lm	≥80	< 0.50 s	106.0 mm
VALUE CLAS B 40 5.7 W/6500 K E14 ¹⁾	5.70 W	220...240 V	470 lm	6500 K	0.70	Cool Daylight	6500 K	470 lm	≥80	< 0.50 s	106.0 mm


Product description	Diameter	Lifespan		Additional product data		Capabilities	Certificates & standards
		Nominal lamp life time	Number of switching cycles	Base (standard designation)	Mercury-free	Dimmable	Energy efficiency class
VALUE CLAS B 25 3.3 W/2700 K E14 ¹⁾	35.0 mm	15000 h	100000	E14	Yes	No	A+
VALUE CLAS B 40 5.7 W/6500 K E14 ¹⁾	35.0 mm	15000 h	100000	E14	Yes	No	A+

Product description	Country-specific categorizations
	ILCOS
VALUE CLAS B 25 3.3 W/2700 K E14 ¹⁾	DRBB/F-4-220-240-E14-35/100
VALUE CLAS B 40 5.7 W/6500 K E14 ¹⁾	

¹⁾ All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

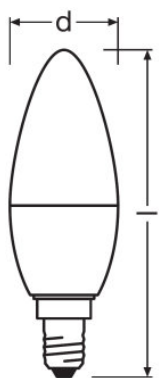

VALUE CLAS B 25 3.3 W/2700 K E14

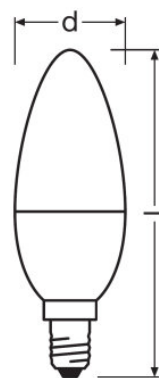

VALUE CLAS B 40 5.7 W/6500 K E14

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899971059	VALUE CLAS B 25 3.3 W/2700 K E14	Shipping carton box 10	205 mm x 87 mm x 123 mm	2.19 dm ³	538.00 g
4052899971066	VALUE CLAS B 40 5.7 W/6500 K E14	Shipping carton box 10	205 mm x 87 mm x 123 mm	2.19 dm ³	538.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.