

PRODUCT DATASHEET

LC RF CONTROL 24V RGBW/TW

LC RF CONTROL RGBW/TW | Dimming controller with radio frequency technology

AREAS OF APPLICATION

- General illumination
- Architecture lighting
- Dynamic light as an architectural effect in public zones
- Cove lighting
- Hotels
- Offices
- Residential interiors

PRODUCT BENEFITS


- Control options via radio remote control or radio control unit
- Dimmable by pulse width modulation (PWM)
- Simple and quick connection thanks to the MATCH function
- Dimming curve logarithmic in a range of 0-100% with a dimming level of 4096

PRODUCT FEATURES

- LED 2.4 GHz master radio receiver
- 5 channels for RGB, RGBW and Tunable White applications
- Supply voltage: 12 V and 24 V
- High performance per channel up to 60 W with 12-24 V power supply


TECHNICAL DATA

Dimensions & weight

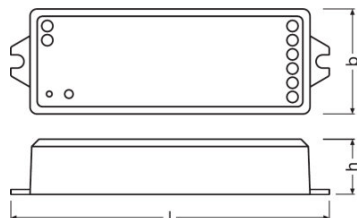

Width	38.0 mm
Height	20.0 mm
Product weight	65.00 g

DOWNLOAD DATA

File	
	User instruction LC RF CONTROL 24V RGBWTW

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075435834	Folding carton box 1	120 mm x 44 mm x 26 mm	75.00 g	0.14 dm ³
4058075435841	Shipping carton box 10	145 mm x 130 mm x 105 mm	818.00 g	1.98 dm ³
4058075509795	Shipping carton box 120	300 mm x 280 mm x 340 mm	10383.00 g	28.56 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.