

PRODUCT DATASHEET

LC RF TOUCH PANEL RGBW 220-240

LC RF TOUCH PANEL RGBW | Controller with radio frequency technology



AREAS OF APPLICATION

- General illumination
- Architecture lighting
- Dynamic light as an architectural effect in public zones
- Cove lighting
- Hotels
- Offices
- Residential interiors

PRODUCT BENEFITS


- Ultra sensitive high strength glass touch panel with touch color slide in the middle and backlighting.
- Dimming of the set light colors RGB and white
- 10 pre-installed color gradients
- Control up to 4 zones
- Separate control of the colors red, green, blue and white
- Easy replaceable for standard light switch

PRODUCT FEATURES

- Radio wall control Touch panel for controlling RGBW LED modules
- Output signal: 2.4 GHz
- Input voltage: 100...240 V


TECHNICAL DATA

Dimensions & weight

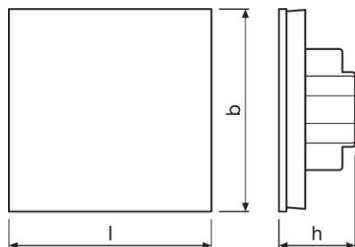

Width	86.0 mm
Height	33.0 mm
Product weight	230.00 g

DOWNLOAD DATA

File	
	User instruction LC RF TOUCH PANEL RGBW 220-240V

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075435896	Folding carton box 1	110 mm x 110 mm x 50 mm	259.00 g	0.61 dm ³
4058075435902	Shipping carton box 10	265 mm x 120 mm x 235 mm	2736.00 g	7.47 dm ³
4058075509832	Shipping carton box 40	500 mm x 280 mm x 260 mm	11592.00 g	36.40 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.