


# DATA SHEET

## PULLING ROPE POLYESTER

Ø 12 mm incl. reel

Item no.: 10120 | 10121 | 10122 | 10123

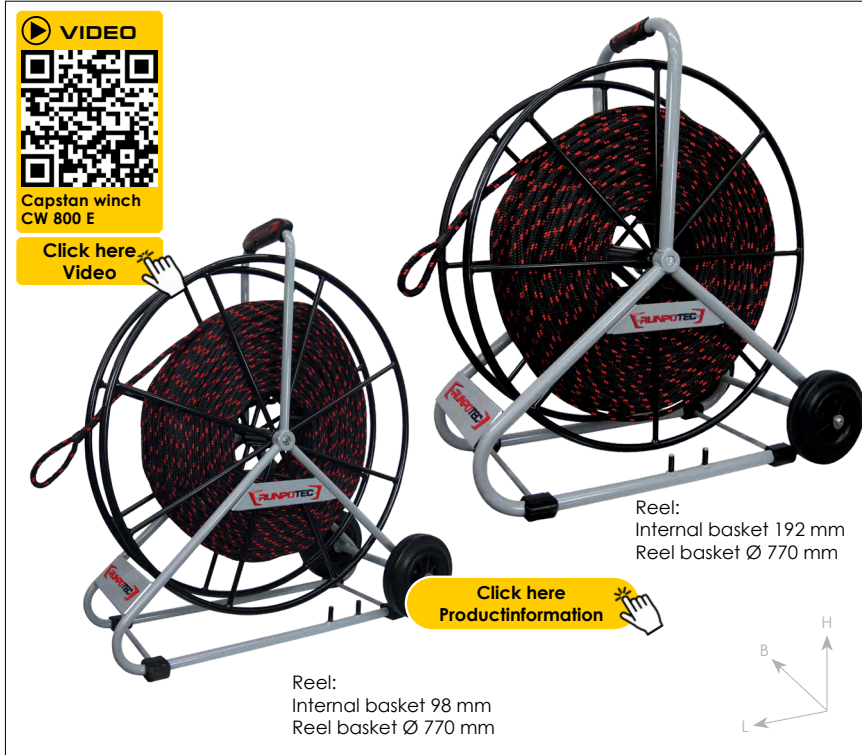

Detailed images:



### DATA

| ITEM NO.               | 10120                | 10121         | 10122         | 10123         |
|------------------------|----------------------|---------------|---------------|---------------|
| LENGTH ROPE            | 150 m                | 200 m         | 300 m         | 350 m         |
| Ø ROPE                 | 12 mm                |               |               |               |
| REEL BASKET Ø ca.      | 730 mm               | 730 mm        | 730 mm        | 730 mm        |
| INTERNAL BASKET ca.    | 98 mm                | 98 mm         | 192 mm        | 192 mm        |
| LENGTH mm ca.          | 820 mm               | 820 mm        | 820 mm        | 820 mm        |
| WIDTH mm ca.           | <b>400 mm</b>        | <b>400 mm</b> | <b>520 mm</b> | <b>520 mm</b> |
| HEIGHT mm ca.          | 900 mm               | 900 mm        | 900 mm        | 900 mm        |
| TOTAL WEIGHT KG        | 30 kg                | 36 kg         | 55 kg         | 61 kg         |
| TOTAL BREAKING LOAD KG | 2180 kg              |               |               |               |
| MATERIAL               | Polyester-Rope       |               |               |               |
| LOOP                   | 2 x spliced-in loops |               |               |               |
| EAN CODE               | 9120045475364        | 9120045475371 | 9120045475388 | 9120045475395 |

### ADVANTAGES

- ✓ **Spliced loops**  
at the start and end of the rope
- ✓ **Low rope elongation**
- ✓ **Practical reel for controlled winding and unwinding of the rope**
- ✓ **Mobile reel with wheel drum and parking brake**

### DESCRIPTION

RUNPOTEC polyester pulling ropes are optimally suited for horizontal cable pulling with the RUNPOTEC CW 800 E capstan winch. RUNPOTEC recommends using the connecting swivel with twist compensation for horizontal cable pulling. It reduces frictional resistance and protects the cable and the feed system.

The reel allows controlled winding and unwinding of the rope. In addition, the rope is perfectly stowed away and ready for use at any time. The 770 mm reel cage size can be easily rolled and transported due to the integrated wheels.



#### Safety instructions:

Not suitable for vertical cable pulling, must not be used to carry or lift loads or persons.

**Optimal application:** for horizontal cable pulling in combination with the CW 800 E capstan winch.

**Application video:** a short, very informative application video can be viewed by scanning the QR code or on [www.runpotec.com](http://www.runpotec.com).

**Scope of delivery:** Pulling rope polyester Ø 12 mm incl. reel

### INFORMATION

#### Compatible accessories:

**Connecting swivel with swivel**

Item no. 10176



[Click here Productinformation](#)

#### Related Pullingsystem:

**Capstan winch CW 800 E + Trolley**

Item no. 10138



[Click here Productinformation](#)