

Multiple socket of 3 sockets 2P+E, 16A 250V~.

Multiple socket of 3 sockets 2P+E, 16A 250V~.MAX. 3680W. White colour. Easy connection access. With fixing holes to the wall.
Common applications: Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)



Features

Type	Multiple base
No. of bases	3
Basic characteristics	2P+E, 16A 250V~
Maximum power	3.680 W
Terminal system	Screw connection
Mini trunking input	Yes, for 7x12, 10x16, 10x20 and 12x12
Possibility of using hanger	Yes
Possibility of using KIT-DIN35	Yes
Wall fixing holes	Yes

Technical data

Protection Degree (IP)	IP20
Fire resistance (GWT)	850°C
Heat resistance (Ball pressure)	125°C
Ambient operating temperature	-5°C ; +60°C
Free of halogens	Yes

Regulations

CE marking	Yes
According to Regulations UNE/EN	UNE-20315-1-1:2017; UNE-20315-1-2:2017
According to REBT	Yes
Intertek certificate	Yes

According to European Directive 2014/35 / EU. Low voltage directive	Not applicable
---	----------------


Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes (Complies with UNE EN 50581)
According to European Directive 2012/19/UE (RAEE2)	Yes

Logistics and packaging

Unit EAN code	8423220239708
EAN code container	8423220063686
EAN code packaging	18423220063683
Units packaging	18
Units carton	72
Pallet Units	2520
Packaging Measurements cm	29x19x18
Packaging Measures cm	59,5x20x37,5
Unit weight (gr)	150
Container Weight (Kg)	0,30
Packaging Weight (Kg)	11,98
Tariff code	85366990

Sketch

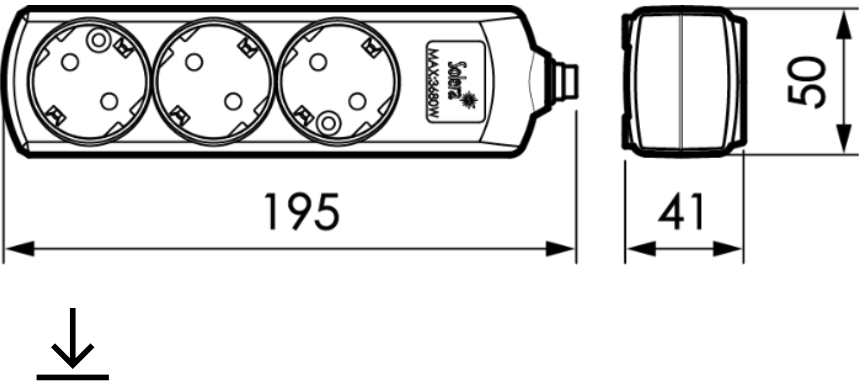

Documentation and downloads



[Assembly instructions \(0.67MB\)](#)



[Certificate \(0.33MB\)](#)