

## Multiple socket of 6 sockets 2P+E, 16A 250V~. With light switch.

Multiple socket of 6 sockets 2P+E, 16A 250V~. With light switch. MAX. 3680W. White colour. Easy connection access. With fixing holes to the wall. Common applications: Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)



### Features

Type	Multiple base
No. of bases	6
Basic characteristics	2P+E, 16A 250V~
Maximum power	3.680 W
Light switch	Yes
Terminal system	Screw connection
Mini trunking input	Yes, for 7x12, 10x16, 10x20 and 12x12
Possibility of using hanger	Yes
Possibility of using KIT-DIN35	Yes
Wall fixing holes	Yes

### Technical data

Protection Degree (IP)	IP20
Fire resistance (GWT)	850°C
Heat resistance (Ball pressure)	125°C
Ambient operating temperature	-5°C ; +60°C
Free of halogens	Yes

### Regulations

CE marking	Yes
According to Regulations UNE/EN	UNE-20315-1-1:2017; UNE-20315-1-2:2017

According to REBT	Yes
Intertek certificate	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


## Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes (Complies with UNE EN 50581)
According to European Directive 2012/19/UE (RAEE2)	Yes

## Logistics and packaging

Unit EAN code	8423220239760
EAN code container	8423220063877
EAN code packaging	18423220063874
Units packaging	10
Units carton	40
Pallet Units	1600
Packaging Measurements cm	35,3x10,3x20,4
Packaging Measures cm	43,5x37,5x22,5
Unit weight (gr)	265
Container Weight (Kg)	2,82
Packaging Weight (Kg)	11,73
Tariff code	85366990

## Sketch

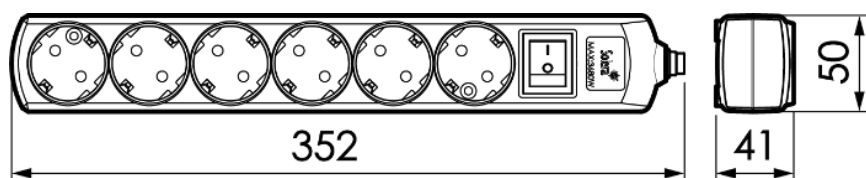

## Documentation and downloads



[Assembly instructions \(0.67MB\)](#)



[Certificate \(0.33MB\)](#)