

## Cable extension with 6 sockets 2P+E, 16A 250V~. With light switch. 3 m of cable.

Cable extension with 6 sockets 2P+E, 16A 250V~. With light switch. 3 m of cable. MAX. 3680 W. Cable H05VV-F 3G1,5mm<sup>2</sup>. With fixing holes to the wall. Common applications: Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)



### Features

Type	Multiple base
No. of bases	6
Basic characteristics	2P+E, 16A 250V~
Cable length	3 m.
Maximum power	3.680 W
Light switch	Yes
Cable	Yes
Cable Features	H05VV-F 3G1,5mm <sup>2</sup>
Possibility of using KIT-DIN35	Yes
Wall fixing holes	Yes

### Technical data

Protection Degree (IP)	IP20
Fire resistance (GWT)	850°C
Heat resistance (Ball pressure)	125°C
Ambient operating temperature	-5°C ; +60°C

### Regulations

CE marking	Yes
According to Regulations UNE/EN	UNE-20315-1-1:2017; UNE-20315-1-2:2017
According to REBT	Yes

Intertek GS certificate	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


## Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes (Complies with UNE EN 50581)
According to European Directive 2012/19/UE (RAEE2)	Yes

## Logistics and packaging

Unit EAN code	8423220020801
EAN code container	8423220020801
EAN code packaging	18423220020808
Units packaging	1
Units carton	10
Pallet Units	400
Packaging Measurements cm	48x0,1x14
Packaging Measures cm	37,5x20x30
Unit weight (gr)	590
Container Weight (Kg)	0,62
Packaging Weight (Kg)	6,51
Tariff code	85366990

## Sketch

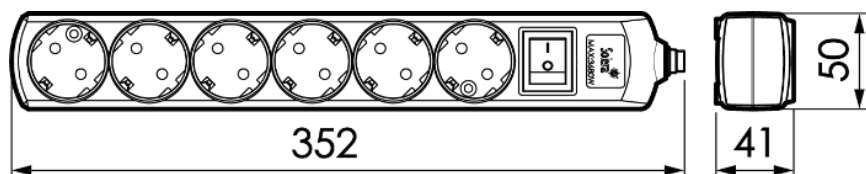

## Documentation and downloads



Assembly instructions (0.67MB)



Certificate (0.3MB)