

Motion detector

# IS 360-1 DE

black

EAN 4007841 032852

**STEINEL**<sup>®</sup>  
Intelligent technology



infrared sensor  
360°



max. 4 m

1000w

1000 W max.



IP54



2 - 2000 lux



8 sec - 35 min



ideal 2,2 m



energy saving

3 JAHRE  
HERSTELLER  
GARANTIE

steinel.de/garantie  
manufacturer's  
warranty  
steinel.de/garantie



CE

## Function description

Intelligent technology for installation. Infrared wall sensor IS 360-1 DE, for indoors and out, ideal for installing in projecting roofs and suspended ceilings, 360° angle of coverage, reach can be set up to 4 m, selectable time and twilight threshold, detection zone can be customised with shrouds.

## Technical specifications

Type	Motion detectors
Dimensions (Ø x H)	78 x 89 mm
Mains power supply	230 – 240 V / 50 – 60 Hz
Sensor Technology	passive infrared
Application, place	outdoors, Indoors
Installation site	ceiling
Type of installation	Installation
Switching zones	304 switching zones
Electronic scalability	No
Mechanical scalability	No
Mounting height	2,50 – 4,00 m
Optimum mounting height	2,5 m
Detection angle	360 °
Angle of aperture	90 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Reach, radial	Ø 4 m (13 m <sup>2</sup> )
Reach, tangential	Ø 8 m (50 m <sup>2</sup> )

Twilight setting TEACH	No
Twilight setting	2 – 2000 lx
Time setting	8 s – 35 Min.
Switching output 1, resistive	1000 W
Switching output 1, number of LEDs / fluorescent lamps	6 pcs.
Constant-lighting control	No
Basic light level function	No
With remote control	No
Interconnection	Yes
IP rating	IP54
Material	Plastic
Ambient temperature	-20 – 40 °C
Colour	black
Colour, RAL	9005
Manufacturer's Warranty	3 years
Version	black
PU1, EAN	4007841032852

Motion detector


# IS 360-1 DE

black

EAN 4007841 032852



## Detection Zone

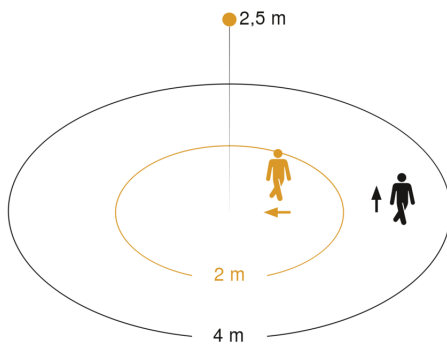

Mögliche Montagehöhe: –  
Orange: radial  
Schwarz: tangential

## Dimension Drawing

