

Motion detector

SensIQ

EVO Anthracite

EAN 4007841 056636

STEINEL[®]
PROFESSIONAL



infrared sensor 3 x
100°



3 zones scalable
2-20m

2500W

2500 W max.



IP54



2 - 2000 lux



5 sec - 15 min



ideal 2 - 5 m



energy saving

5 JAHRE
HERSTELLER
GARANTIE

manufacturer's
warranty
steinel-professional.de/garantie



CE

Function description

The king of motion detectors. The revolutionary sensIQ for indoors and outdoors, ideal for building entrances, loading bays, for mounting heights of up to 5 m, quadruple sensor system for optimum surveillance over a 300° coverage angle, 20 m reach (tangential), reach setting to the accuracy of a metre in 3 independent directions, powerful relay for high switching capacity. Including remote control and corner wall mount.

Technical specifications

Type	Motion detectors
Type of accessory	Corner adapter
Dimensions (L x W x H)	144 x 113 x 172 mm
Mains power supply	230 V / 50 – 60 Hz
Sensor Technology	passive infrared
Application, place	Indoors
Application, place, room	multi-storey car park, underground car park
Installation site	wall, ceiling, corner
Type of installation	Surface wiring
Switching zones	1360 switching zones
Electronic scalability	No
Mechanical scalability	Yes
Mounting height	2,00 – 5,00 m
Optimum mounting height	2 m
Detection angle	300 °
Angle of aperture	90 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes

Reach, detail	Reach adjustable from 2 - 20 m in 3 directions (100° in each)
Reach, radial	r = 20 m (1047 m²)
Reach, tangential	r = 20 m (1047 m²)
Twilight setting TEACH	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Constant-lighting control	No
Basic light level function	No
With remote control	Yes
Interconnection	Yes
IP rating	IP54
Material	Plastic
Ambient temperature	-20 – 50 °C
Colour	Anthracite
IDs, certificates	VDE
Manufacturer's Warranty	5 years
Version	Anthracite
PU1, EAN	4007841056636

<https://www.steinel.de>

Motion detector

SensIQ

EVO Anthracite

EAN 4007841 056636




Accessories

EAN 4007841 009151 Remote control Smart Remote

EAN 4007841 007638 Remote control RC9

Detection Zone

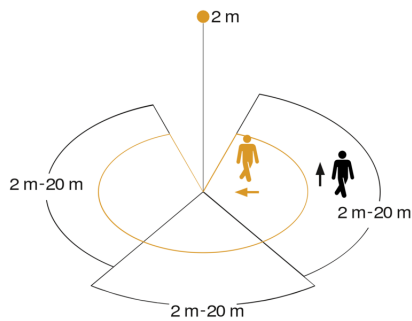


Mögliche Montagehöhe: 2,00 m – 5,00 m

Orange: radial


Schwarz: tangential

3 skallerbare Zonen


Dimension Drawing

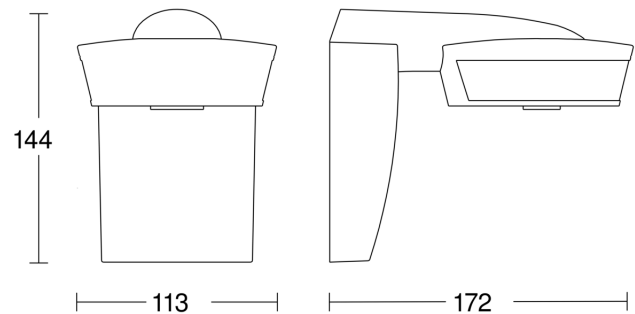


Light without neutral conductor

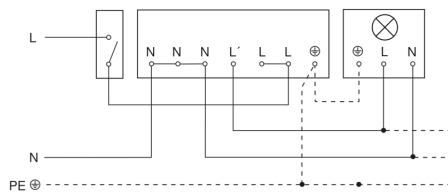

Light with neutral conductor

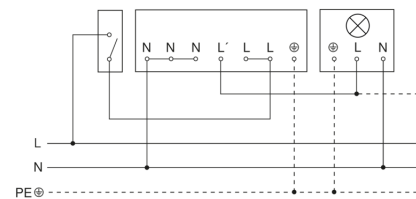

Connection using two-circuit switch for manual and automatic operation

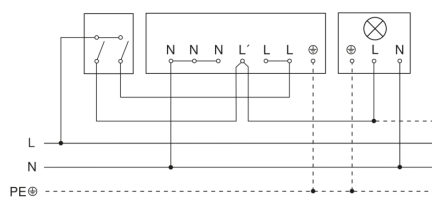

Connection via a two-way switch for manual override and automatic operation

