

Motion detector

# IS D360

EAN 4007841 601317

**STEINEL**<sup>®</sup>  
PROFESSIONAL



infrared sensor  
360°



max. 8 m

1000w

1000 W max.



IP20



2 - 2000 lux



5 sec - 20 min



ideal 2,5 m



energy saving

5 JAHRE  
HERSTELLER  
GARANTIE

manufacturer's  
warranty  
steinel-professional.de/garantie



CE

## Function description

The compact class. Recessed ceiling motion detector IS D360 for indoors, ideal for mounting in any standardized spot bezel, installation height up to 2.5 m, in the size of a bulb (e.g. GU10), 360° angle of coverage, max. reach 8 m (tangential), floating contact 50-250 volts.

## Technical specifications

Type	Motion detectors	Reach, tangential	Ø 16 m (201 m <sup>2</sup> )
Dimensions (Ø x H)	82 x 83 mm	Twilight setting TEACH	No
Mains power supply	230 – 240 V / 50 Hz	Twilight setting	2 – 2000 lx
Sensor Technology	passive infrared	Time setting	5 s – 20 Min.
Application, place	Indoors	Switching output 1, resistive	1000 W
Installation site	ceiling	Constant-lighting control	No
Type of installation	Concealed wiring	Basic light level function	No
Switching zones	720 switching zones	With remote control	No
Electronic scalability	No	Interconnection	Yes
Mechanical scalability	No	IP rating	IP20
Mounting height	2,50 – 4,00 m	Material	Plastic
Optimum mounting height	2,5 m	Ambient temperature	-20 – 50 °C
Detection angle	360 °	Colour	white
Angle of aperture	180 °	Colour, RAL	9010
Sneak-by guard	Yes	Manufacturer's Warranty	5 years
Capability of masking out individual segments	Yes	PU1, EAN	4007841601317
Reach, radial	Ø 8 m (50 m <sup>2</sup> )		


Motion detector

# IS D360

EAN 4007841 601317

**STEINEL**<sup>®</sup>  
PROFESSIONAL

## Detection Zone

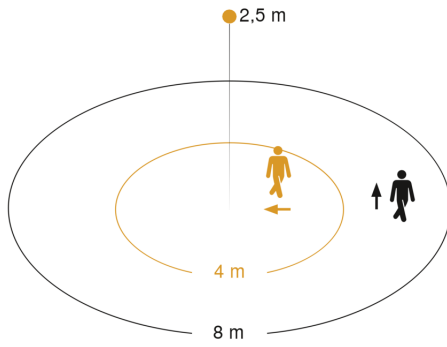

Mögliche Montagehöhe: 2,50 m – 4,00 m  
Orange: radial  
Schwarz: tangential

## Dimension Drawing

