


Sensor-switched indoor light

# RS 16 L

EAN 4007841 738013

**STEINEL**<sup>®</sup>  
Intelligent technology



max.60w



high frequency  
sensor 360°



Ø 3 - 8 m



IP44



2 - 2000 lux



5 sec - 15 min



energy saving



3 JAHRE  
HERSTELLER  
GARANTIE  
steinel.de/garantie



CE



EMC

## Function description

Great value. High-frequency indoor light RS 16 L, ideal for corridors, hallways, stairwells and bathrooms, 360° angle of coverage, infinitely variable electronic reach setting from 3 - 8 m, selectable time and twilight threshold, capability of connecting additional loads (e.g. extractor fan).

## Technical specifications

Dimensions (Ø x H)	275 x 95 mm
Mains power supply	230 – 240 V / 50 Hz
Sensor Technology	High frequency
Transmitter power	< 1 mW
Output	60 W
Interconnection	Yes
Switching output 1, resistive	800 W
With lamp	No
Lamp	All-purpose lamp
Base	E27
With motion detector	Yes
Detection	also through glass, wood and stud walls
Detection angle	360 °
Angle of aperture	160 °
Electronic scalability	Yes

Mechanical scalability	No
Reach, radial	Ø 8 m (50 m²)
Reach, tangential	Ø 8 m (50 m²)
Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Impact resistance	IK00
IP rating	IP44
Protection class	II
Ambient temperature	-10 – 50 °C
Housing material	Plastic
Cover material	Glass opal
Manufacturer's Warranty	3 years
PU1, EAN	4007841738013

## Accessories

EAN 4007841 035181 Replacement base for RS 16


Sensor-switched indoor light

# RS 16 L

EAN 4007841 738013

**STEINEL**<sup>®</sup>  
Intelligent technology

## Detection Zone

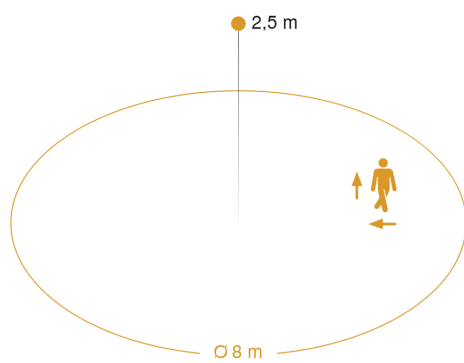

Mögliche Montagehöhe: –  
Orange: radial und tangential