

Start Bulkhead LED IP65 Oval

START BULKHEAD LED IP65 OVAL 3K 950LM
0049184



Product features

- "LED exterior bulkhead, oval, comes with 2m cable, white polycarbonate body, 967LM, 12W,81lm/W, 3000K, Driver Current 150mA, CRI80, , non-dimmable, IP65, IK08, 25000hrs (L70), (LxWxD) 193x122x78mm"



PRODUCT OVERVIEW

IPC Code	0049184
Product name	START BULKHEAD LED IP65 OVAL 3K 950LM
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Logistics & Industry,Residential & Consumer
ETIM Class	EC002892
E-number SE	7505123
Fixture luminous flux (lm)	967
Luminous flux (lm)	967
Luminaire efficacy (lm/W)	80.6
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1
Total power consumption (W)	12
Electrical protection	Class II
Dimmable	No
Housing colour	White
IP rating	IP65
IK rating	IK08
Product EAN number	5410288491844

DATA TABLE

General data

IPC Code	0049184
Product name	START BULKHEAD LED IP65 OVAL 3K 950LM
Technology	LED
Housing	PC Polycarbonate

Start Bulkhead LED IP65 Oval

START BULKHEAD LED IP65 OVAL 3K 950LM
0049184

Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Logistics & Industry, Residential & Consumer
Operating temperature range (°C)	-10°C - 40°C
ETIM Class	EC002892
E-number SE	7505123

Optical data

Fixture luminous flux (lm)	967
Luminous flux (lm)	967
Luminaire efficacy (lm/W)	80.6
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	12
Current (A)	0.06
Mains voltage (V)	220-240V~
Electrical protection	Class II
Dimmable	No
Drive current (mA)	150
Inrush Duration (µs)	400
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	28
Max. Luminaires per 16A C Breaker	45

Lifetime data

Lumen maintenance - L70 B50	25000
Lumen maintenance - L70 B20	23000
Lumen maintenance - L70 B10	21000
Lumen maintenance - L80 B50	19000
Lumen maintenance - L80 B20	17500
Lumen maintenance - L80 B10	16000

Physical data

Housing colour	White
IP rating	IP65
IK rating	IK08
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	78
Nominal Product Width (mm)	122
Nominal Product Height (mm)	193
Weight (kg)	0.44


Start Bulkhead LED IP65 Oval

START BULKHEAD LED IP65 OVAL 3K 950LM
0049184

Packaging

Single packaging type	Carton
Product EAN number	5410288491844
Packaging single length / height (cm)	20.5
Packaging single width (cm)	11.0
Packaging single depth (cm)	19.5
DUN14 (outer)	15410288491841
Units per outer package	6
Packaging outer length / height (cm)	43.0
Packaging outer width (cm)	35.0
Packaging outer depth (cm)	21.5


PHOTOMETRY

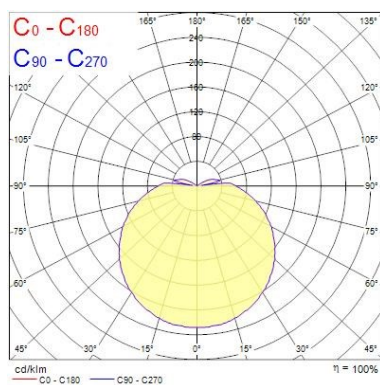

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Illuminance [lx]
0.5	2.70	135.4	2.70	883
1.0	5.41	135.4	5.41	221
1.5	8.11	135.4	8.11	96
2.0	10.81	135.4	10.81	60
2.5	13.52	135.4	13.52	48
3.0	16.22	135.4	16.22	39

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 135.4°)

TECHNICAL DRAWINGS




Start Bulkhead LED IP65 Oval *START BULKHEAD LED IP65 OVAL 3K 950LM* 0049184

SYLVANIA 0049184



This luminaire contains built-in LED lamps

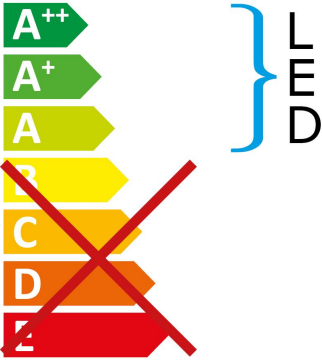


The lamps cannot be changed in the luminaire.

874/2012 



This luminaire contains built-in LED lamps

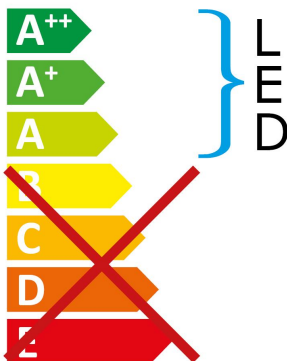

The lamps cannot be changed in the luminaire.

SYLVANIA 0049184 

874/2012