


INS-UP720B, INS-UP720BX, INS-UP720M - Digital headphone uniphones for 2-wire P system




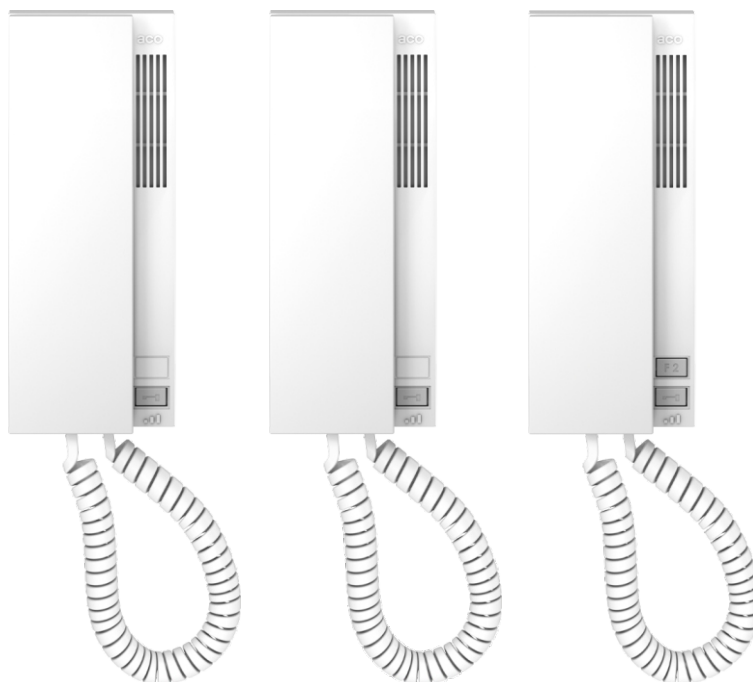


Headphone uniphones with a traditional and magnetic hanging up of the handset with two or one button. ACO receivers are solid devices, made of the highest quality materials, functional and easy to use. Minimalist form allows for versatile use of the devices in various types of investments.

Compatible with digital control panels and panels from groups: CDNP, Inspiro and Familio P.

Index	INS-UP720B	INS-UP720BX	INS-UP720M
Description	Passive digital uniphone with traditional 2 hook handset hanging up and 1 push button for 2-wire P system	Passive digital uni phone with magnetic handset hanging up, 1 button and RJ45 connector, for 2-wire P system	Passive digital uniphone with magnetic handset hanging up and 2 buttons, for 2-wire P system
Material	ABS plastic housing	ABS plastic housing	ABS plastic housing
Colors available	White	White	White
Mounting	Surface mounted	Surface mounted	Surface mounted
Installation type	Digital: 2 wires	Digital: 2 wires	Digital: 2 wires
Power supply	-	-	-
Inputs	2 x ARK screw terminals (system bus P) - to connect the audio signal: „LINE+“ and „LINE-“	2 x ARK screw terminals (system bus P) - to connect the audio signal: „LINE+“ and „LINE-“ 1 x RJ45 socket (P system bus)	2 x ARK screw terminals (system bus P) - to connect the audio signal: „LINE+“ and „LINE-“ 1 x optional RJ45 socket (P system bus) - for INS-UP720M_RJ
Outputs	-	-	The F2 button: - controlled using the system bus (optional or built-in CDN-I/O relay module required) or - Screw connections: NO separated from the system (max 18VDC 100mA)
Attributes	- double hook for hanging up the handset - 1 button: opening - 3-stage ringing volume control - hold function - possibility to hang up the handset without disconnecting the call - compatible with all digital group devices: CDNP, Inspiro and Familio P	- magnetic handset hanging up mechanism eliminating the problem of hook breakage - 1 button: opening - 3-stage ringing volume control - hold function - possibility to hang up the handset without disconnecting the call - Built-in RJ45 connector for easy and quick connection of the system bus - compatible with all digital group devices: CDNP, Inspiro and Familio P	- magnetic handset hanging up mechanism eliminating the problem of hook breakage - 2 buttons: opening, functional for controlling external devices (some models of control panels or panels require an optional CDN-I/O relay module) - 3-step ringing volume control - hold function - possibility to hang up the handset without disconnecting the call- home automation - control of external devices, e.g. gate, barrier, lighting, roller blinds - compatible with all digital group devices: CDNP, Inspiro and Familio P

KK0155envA.2022

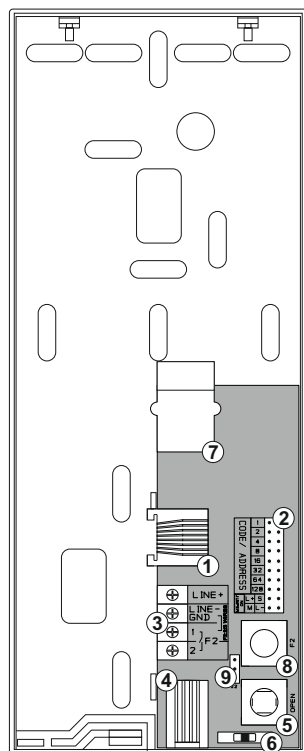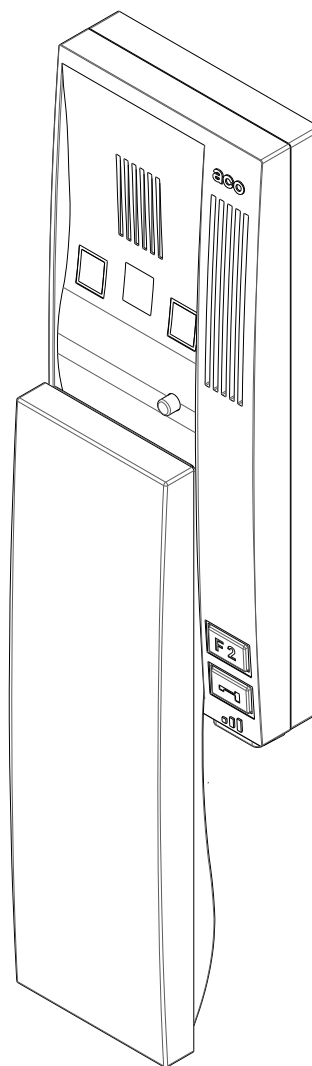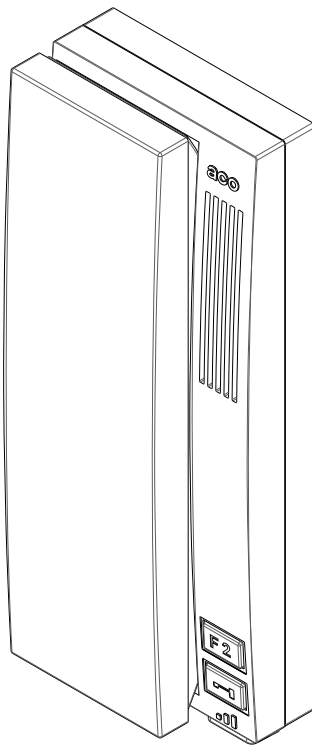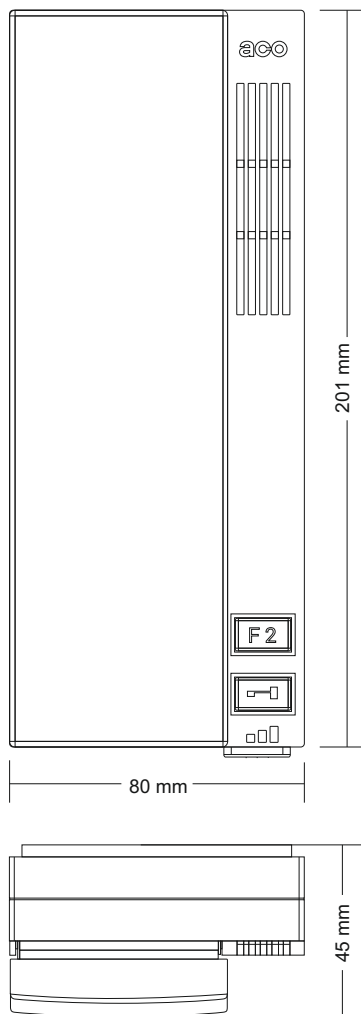

- ①- RJ 45 socket (INS-UP720BX only)
- ②- address jumpers
- ③- ARK terminals
LINE+
LINE - (GND)
- 1 (F2)
2 (F2) (INS-UP720M only)
- ④- headphone socket
- ⑤- open button
- ⑥- volume control switch
- ⑦- handset lift switch
- ⑧- function key F2 (INS-UP720M only)
- ⑨- jumper setting the way F2 button works (INS-UP720M only)

