

Electric strike 118E-----D11

Without strike plate, 6-12 V AC/DC

Product description


Model with mechanical unlocking.

Overview of Advantages

- Radius keeper, FaFix®, adjustable by 3 mm
- Voltage range
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Technical data

Dimensions	Height: 66 mm , Width: 16 mm , Depth: 25.5 mm
Version	Standard electric strikes
Latch version	Radius keeper
Mounting	symmetrical
Installation position	universal
Configuration	Frame component
With fixing	No
With mechanical unlocking	Yes
With feedback signal	No
Opening direction according to DIN	left/right
Waterproof	No
Mounting method	Installation
Compatible with Apple HomeKit	No
Compatible with Google Assistant	No
Type of current	AC/DC
How they work	Fail-locked
Compatible with Amazon Alexa	No
IFTTT support available	No
Pulse contact	Yes
Adjustable keeper	Yes
Adjustable electric strike	No
Adjustable strike plate	No
Latch bolt guide integrated	No
For latch bolt slide	No
Unlocking type	Standard version
Mechanical unlocking	Yes
Suitable for smoke protection door	No
With strike plate	No
Dead bolt cutout	No
Pre-equipped for bolt switch contact	No
Use category according to EN 14846	3
Endurance according to EN 14846	X
Mass of the door, closing force in accordance with EN 14846	5
Suitable for fire/smoke protection doors according to EN 14846	0
Environmental condition according to EN 14846 0	
Security – Burglary protection against entry in accordance with EN 14846	0
Protective effect of electrical function in accordance with EN 14846	0
Protection against electrical manipulation in accordance with EN 14846	1
Break-in resistance	3750 N
Latch adjustment range	3 mm
Load cycles for in-plant test	250000
Changeable connection	No
Protective diode	No
Noise reduction	No
Drill hole offset by 1 mm	No
Unlocking time	0.8 s
Operating temperature range	-15-40 °C

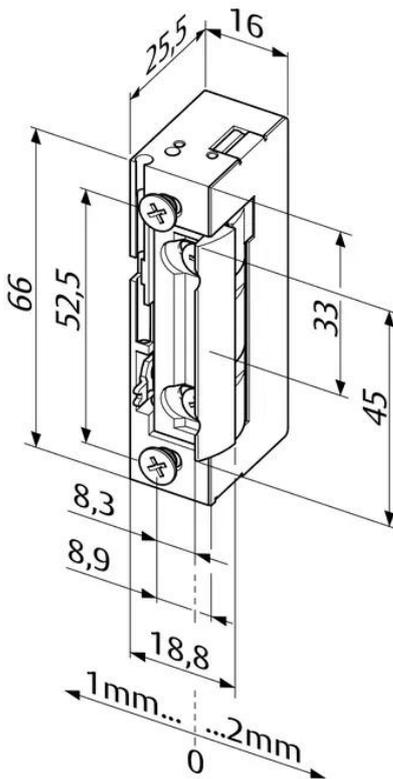

Electric strike 118E-----D11

Without strike plate, 6-12 V AC/DC

Certified in compliance with	EN 14846
Suitable for fire door	No
Voltage	6-12 V
Permanent operation (100% power-on time)	No
Max. latch preload AC	160 N
Min. preload AC	160 N
Max. latch preload DC	60 N
Min. preload DC	10 N
max. current consumption AC	1100 mA
Max. current consumption DC	1300 mA
Nominal resistance 12 V	9 Ohm
Clampable/ plug-in connection	No
<hr/>	
Article number	118E-----D11
EAN	4042203380318