

# Electric strike 138F- - - - - E91

Without striking plate, 12 V DC

## Product description

Model with bipolar protective diode. Also useable as a heavy-duty electric strike.

## Overview of Advantages

- Radius keeper, FaFix®, adjustable by 3 mm
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

## Scope of delivery


- 1 piece electric strike

## Note

- Can only be used as a supplementary locking device on fire doors
- Not an authorised locking system for doors along escape and rescue routes

## Technical data

Dimensions	Height: 66 mm , Width: 16 mm , Depth: 25.5 mm
Version	Security electric strikes
Latch version	Radius keeper
Mounting	symmetrical
Installation position	universal
Configuration	Frame component
With fixing	No
With mechanical unlocking	No
With feedback signal	No
Opening direction according to DIN	left/right
Waterproof	No
Mounting method	Installation
Compatible with Apple HomeKit	No
Compatible with Google Assistant	No
Type of current	DC
Compatible with Amazon Alexa	No
IFTTT support available	No
How they work	Fail-unlocked
Pulse contact	Yes
Adjustable keeper	Yes
Adjustable electric strike	No
Adjustable strike plate	No
Latch bolt guide integrated	No
For latch bolt slide	No
Protective diode	Yes
Noise reduction	No
Unlocking type	Standard version
Permanent operation (100% power-on time)	Yes
Mechanical unlocking	No
Suitable for fire door	No
Suitable for smoke protection door	No
With strike plate	No
Unlocking time	0.1 s
Break-in resistance	9000 N
Protection against electrical manipulation in accordance with EN 14846	1
Max. latch preload DC	30 N
Min. preload DC	10 N
Use category according to EN 14846	3
Endurance according to EN 14846	A
Mass of the door, closing force in accordance with EN 14846	5
Suitable for fire/smoke protection doors according to EN 14846	0
Environmental condition according to EN 14846	0

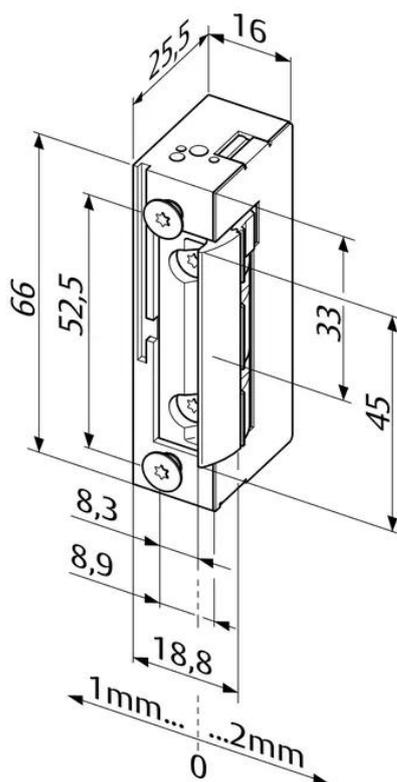

# Electric strike 138F- - - - - E91

Without striking plate, 12 V DC

Security – Burglary protection against entry in accordance with EN 14846	0
Protective effect of electrical function in accordance with EN 14846	0
Latch adjustment range	3 mm
Load cycles for in-plant test	250000
Changeable connection	No
Drill hole offset by 1 mm	No
Certified in compliance with	EN 14846
Voltage	12 V
Max. current consumption DC	235 mA
Continuous duty	12 V
Nominal resistance 12 V	51 Ohm
Operating temperature range	-15-40 °C
Clampable/ plug-in connection	No
Nominal operating voltage tolerance	+ - 10 %

Article number	138F-----E91
EAN	4042203468535