

Electric strike 17- - - - - D11

Without strike plate, 6-12 V AC/DC

Product description

Model with basic equipment.

Overview of Advantages

- Suitable for all common striking plates
- Due to 180° fitting, can be used DIN right and left
- Symmetrical design


Scope of delivery

- 1 piece electric strike

Technical data

Dimensions	Height: 75 mm , Width: 20.5 mm , Depth: 28 mm
Version	Standard electric strikes
Latch version	Standard latch
Mounting	symmetrical
Installation position	universal
Configuration	Frame component
With fixing	No
With mechanical unlocking	No
With feedback signal	No
Opening direction according to DIN	left/right
Waterproof	No
Mounting method	Installation
Compatible with Apple HomeKit	No
Compatible with Google Assistant	No
How they work	Fail-locked
Compatible with Amazon Alexa	No
IFTTT support available	No
Pulse contact	Yes
Adjustable keeper	Yes
Adjustable electric strike	No
Adjustable strike plate	No
Latch bolt guide integrated	No
For latch bolt slide	No
Unlocking type	Standard version
Mechanical unlocking	No
Suitable for smoke protection door	No
Break-in resistance	3500 N
Min. preload DC	10 N
Latch adjustment range	3 mm
Load cycles for in-plant test	250000
Changeable connection	No
Clampable/ plug-in connection	No
Protective diode	No
Noise reduction	No
Drill hole offset by 1 mm	No
Unlocking time	0.8 s
Operating temperature range	-15-40 °C
Certified in compliance with	EN 14846
Suitable for fire door	No
Voltage	6-12 V
Type of current	AC/DC
Permanent operation (100% power-on time)	No
Max. latch preload AC	150 N
Min. preload AC	80 N
Max. latch preload DC	90 N
max. current consumption AC	1100 mA
Max. current consumption DC	1300 mA
Nominal resistance 12 V	9 Ohm

Article number 17-----D11

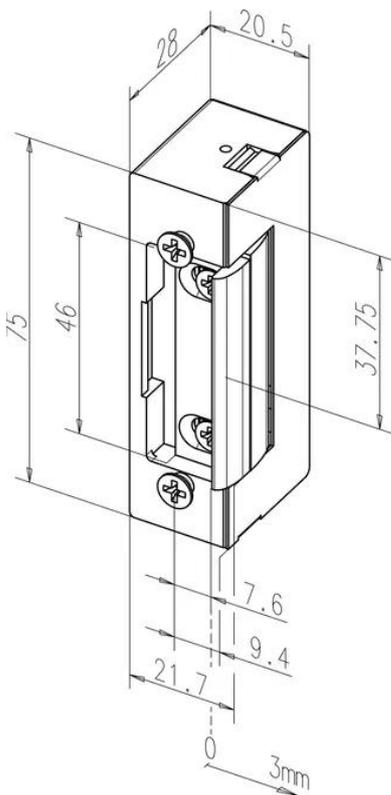

Electric strike 17-----D11

Without strike plate, 6-12 V AC/DC

EAN

4042203130562

