



NEOLUX®
GERMAN TECHNOLOGY

Standard 21/5 W 12 V BAY15d



Product family benefits

- Suitable for the most common signal and interior applications
- Affordable
- Reliable manufacturer
- For good visibility
- Reliable products

Product family features

- Broad product range
- Good quality thanks to German technology
- Lamps for exterior applications are ECE certified
- Normed light output
- Basis for good light distribution

Areas of application

- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting



N380



N380-02B

Product information	
Application (Category and Product specific)	Auxiliary lamp

Electrical data	
Power input	25 W
Test voltage	13.5 V
Power input tolerance	±6 %
Nominal wattage	21/5 W
Nominal voltage	12.0 V

Photometrical data	
Luminous flux	440/35 lm
Luminous flux tolerance	±15 %

Dimensions & weight	
Diameter	27.0 mm
Product weight	10.50 g
Length	52.5 mm

Lifespan	
Lifespan Tc	160 h
Lifespan B3	60 h


Additional product data	
Base (standard designation)	BAY15d

Certificates & standards	
ECE category	P21/5W
British standard	380

Logistical data	
Order reference	N380

Environmental information	
Date of Declaration	28-10-2022
Primary Article Identifier	4008321770448 4008321770868 4008321799555 4008321812698 4006584795659 4006584795673 4055462033925 4052899225619 4055462079787 4055462300881 4006584920211
Candidate List Substance 1	No declarable substances contained
Declaration No. in SCIP database	In work

Packaging Information			
Packaging description	EAN	Packaging type	Amount of article
NEOLUX			
N380	4008321770448	Folding box	10
N380-02B	4008321799555	Blister	2

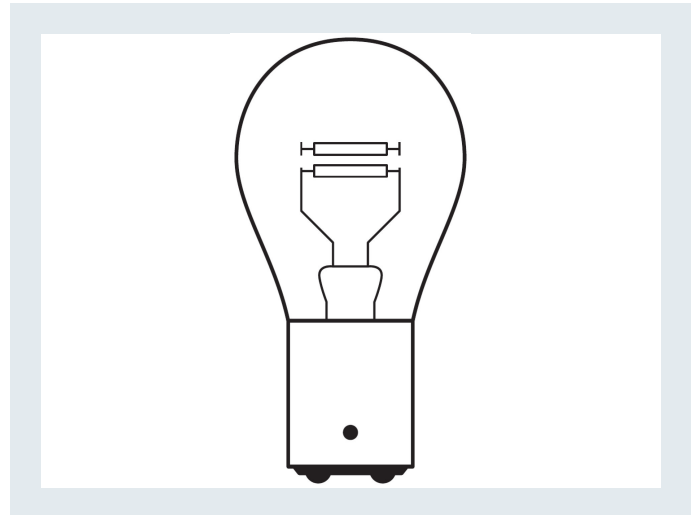

NEOLUX[®]
GERMAN TECHNOLOGY

NEOLUX Automotive Lighting
OSRAM GmbH

Marcel-Breuer-Str 4
80807 Munich, Germany

Phone +49 89 6213-0
Fax +49 89 6213-2020

www.neolux-lighting.com