


PRODUCT DATASHEET

DR-PFM -100/220-240/24/P

LED STRIP VALUE-600 PROTECTED | IP65 protected LED strips with 600 lm/m for general applications

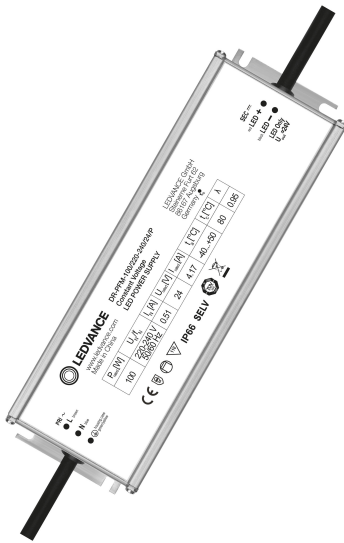

Areas of application

- Suitable for indoor and outdoor installations
- Facade and building illumination
- Ideal for illuminating public spaces
- Bathrooms, kitchens and outdoor areas
- Offices, shopping centers, hospitals, restaurants, hotels

Product benefits

- Perfectly matched to 24 V LED flexible strips
- 5 years guarantee
- Very stable output power
- Quick and simple installation due to prewiring
- High efficiency and reliability
- Installation in very cold and hot environments

Product features

- Available in 30 W, 60 W, 100 W, 150 W and 250 W
- Lifetime: up to 50,000 h (at max. tc temperature)
- Type of protection: IP66
- Operating temperature range at ta: -40...50 °C
- Supply voltage: 220...240 V
- Operating frequency: 50/60 Hz
- Surge protection: up to 4 kV (L-N) for 30W/60W, 6 kV (L-N) / 6 kV (L/N-PE) for 100W/150W/250W
- Short-circuit and overload protection

TECHNICAL DATA

Electrical data

Nominal wattage	100.00 W
Nominal output power	100 W ¹⁾
Nominal voltage	220...240 V
Nominal output voltage	24 V ²⁾
Input voltage AC	198...264 V ³⁾
U-OUT (working voltage)	24 V
Type of current	DC
Nominal current	525 mA
Nominal output current	4170 mA ⁴⁾
Inrush current	46 A
Mains frequency	50...60 Hz
Total harmonic distortion	< 20 % ⁵⁾
Power factor λ	0.95 ⁶⁾
ECG efficiency	89 % ⁷⁾
Device power loss	13 W ⁸⁾
Max. ECG no. on circuit breaker 10 A (B)	13
Max. ECG no. on circuit breaker 16 A (B)	16
Max. ECG no. on circuit breaker 25 A (B)	25
Surge capability (L/N-Ground)	6 kV
Surge capability (L-N)	6 kV
Galvanic isolation	SELV

1) From 0 to 100 W

2) Maximum 24 V

3) Permitted voltage range

4) $\pm 10\%$


5) At full load, 220...240 V, 50 Hz

6) Full load at 230 V

7) At full load and 230 V

8) Pour une charge maximale de 100 W de LED

Dimensions & Weight



Length	197.00 mm
Mounting hole spacing, length	188,0 mm
Width	63.00 mm
Height	38.00 mm
Cable cross-section, input side	1 mm ²
Cable cross-section, output side	1 mm ²
Prewired	Yes
Product weight	840.00 g

Colors & materials

Product color	Aluminum
Casing material	Metal
Body material	Metal

Temperatures & operating conditions

Ambient temperature range	-40...+50 °C
Maximum temperature at tc test point	80 °C
Max.housing temperature in case of fault	110 °C
Temperature range in operation	-40...+50 °C
Permitted rel. humidity during operation	20...95 % ¹⁾

¹⁾ Maximum 56 days/year at 95%

Lifespan

ECG lifetime	50000 h ¹⁾
--------------	-----------------------

¹⁾ At maximum $T_c = 80^\circ\text{C}$ / 10% failure rate

Additional product data

Encapsulated	Yes
--------------	-----

Capabilities

Dimmable	No
Dimming interface	Not dimmable
Overheating protection	Yes
Overload protection	No
Short-circuit protection	Yes
Max. cable length to lamp/LED module	10 m
Suitable for fixtures with prot. class	I
Suitable for emergency lighting	No

Type of connection, output side	Cables
---------------------------------	--------





Certificates & Standards

Approval marks – approval	CE / TUV
Standards	Acc. to EN 61347-1 / Acc. to EN 61347-2-13 / Acc. to EN 55015 / Acc. to EN 61547 / Acc. to EN 61000-3-2 / Acc. to EN 62384
Protection class	I
Type of protection	IP66

LOGISTICAL DATA

Temperature range at storage	-40...+80 °C
------------------------------	--------------

DOWNLOAD DATA

DOWNLOAD DATA	
	User instruction LED DRIVER OUTDOOR PFM
	PRODUCT DATASHEET DR-PFM-100/220-240/24/P
	Declarations of conformity EU Declaration of Conformity 3581723
	Catalogs LEDVANCE LED Strip System - Wave 2 - Fall 2020 (EN)

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075239937	Folding box 1	256 mm x 89 mm x 47 mm	902.00 g	1.07 dm ³
4058075239944	Shipping box 10	273 mm x 196 mm x 263 mm	9413.00 g	14.07 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.