


## ECICTA20TBL

### HF ICTA PLIABLE PP CONDUIT 34223 Ø20 mm - 100 m WITH DRAW TAPE - BLUE

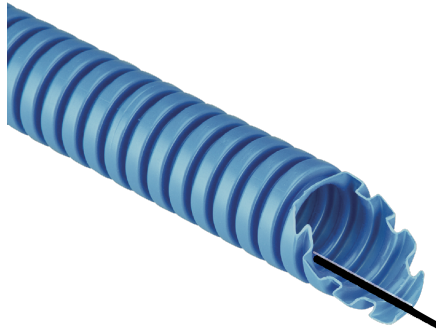

Conduits and fittings > Conduits > Corrugated conduits >  
Series icta - pp - class 34223 - 750 n > plastic conduits > Black  
- cable puller

#### Technical Symbols/Marks/Approvals



#### Norms

EN 61386-1 EN 61386-22 EN 61034-2 EN 50642

## Etim

### GROUP EG000002 - Pipes/hoses for cable installation

#### CLASS EC001174 - Plastic installation tube

<b>Flush-mounted installation</b>	Yes	<b>Material</b>	Polypropylene (PP)	<b>Halogen free</b>	Yes
<b>Colour</b>	Blue	<b>RAL-number</b>	5005	<b>UV resistant</b>	No
<b>Suitable for underground installation</b>	No	<b>Operating temperature</b>	-5-90 °C	<b>Bending strength</b>	Pliable, self recovering
<b>Compressive strength class according to EN 61386-1</b>	Medium (class 3 / 2 Joule)	<b>Impact strength class according to EN 61386-1</b>	Heavy (class 4 / 6 Joule)	<b>With sleeve</b>	No
<b>Fire retardant version</b>	Yes	<b>Surface mounting</b>	No	<b>Suitable for installation on wood</b>	Yes
<b>Suitable for hollow wall installation</b>	Yes	<b>Suitable for concrete installation</b>	Yes	<b>Machine and systems installation</b>	No
<b>Suitable for underfloor installation (screed)</b>	Yes	<b>Suitable for outdoor installation</b>	No	<b>Inner diameter</b>	13.5 mm
<b>Outer diameter</b>	20 mm	<b>High conducting inner coating</b>	Yes	<b>With metre indication</b>	No

## Technical Characteristics

Lunghezza Bobina 100 m

## Documentation available for download



**Certification**  
Test Report ICTA  
Contenuto alogeni  
MI23-0092109-01.pdf



**Brochure**  
BROCHURE TUBI  
doppie.pdf

## Barcode



8059307211116  
**Cardboard**  
100 MT  
0.51x0.51x0.24 [m]  
6.9 [kg]



8059307211345  
**Pallet**  
5000 MT  
0.8x1.2x2.5 [m]  
345 [kg]