




GE
Lighting

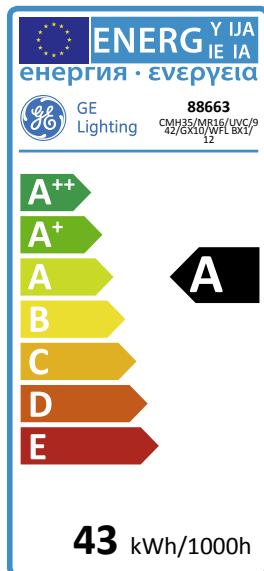

43
kWh/1000h

A
energy class

56
lumens/watt

ConstantColor™ CMH MR16 CMH35/MR16/UVC/942/GX10/WFL BX1/12 88663

Product information

ConstantColor™ CMH lamps combine HPS technology (providing stability, efficiency & uniformity) and Metal Halide Technology (providing bright white quality light) to produce highly efficient light sources with good colour rendering and consistent colour performance through life.

This is achieved by using the ceramic arc tube material from the Lucalox™ lamp, which minimises the chemical changes inside the lamp through life.

Application areas



Retail



Industrial



Product data

Cap/Base	GX10
Bulb Shape	Mirrored reflector
Bulb Finish	Clear
Bulb Diameter [mm]	51
Maximum Overall Length [mm]	54.5
Net weight per piece [g]	64
Gross weight per piece [g]	100
Operating position	U - Universal
Mercury Content [mg]	3.5
UV radiance	Exempt
Brand	General Electric (GE)

Performance data

Colour Code	942
Colour Rendering Index (CRI) [Ra]	92
Nominal correlated colour temperature (CCT) [K]	4000
Nominal beam angle [°]	40
Rated beam angle [°]	40.7
Nominal center beam candlepower (CBCP) [cd]	3000
Rated peak intensity in [Cd]	3413
Nominal lumens [lm]	2200
Rated Lumens [lm]	1866
Nominal useful lumens [lm]	1866
Rated useful lumens [lm]	1866
Nominal efficacy [LpW]	56
Rated efficacy [LpW]	48.6
Energy efficiency class (EEC)	A
Rated average life [h]	12000
Nominal chromaticity coordinate X	0.377
Nominal chromaticity coordinate Y	0.365
Weighted energy consumption [kWh/1000h]	42.2



Electrical data

Nominal power [W]	39
Rated power [W]	38.4
Nominal lamp voltage [V]	90
Lamp Current [A]	0.4
Design Ambient Temperature [°C]	25
Run-up time (sec)	90
Hot restart time (sec)	390
Ballast Required	Yes


Logistic data

DUN Code	10043168886632
EAN Code	43168886635
Pack Quantity	12
Inner pack type	BOX
Outer pack type	OUTER BOX
Layer quantity	288 EUR, 348 UK
Layer quantity EUR	288
Layer quantity UK	348
Pallet quantity EUR (PC)	4032
Pallet quantity UK (PC)	4872
Outer case size	226 x 171 x 77 (mm)


Photometric Data

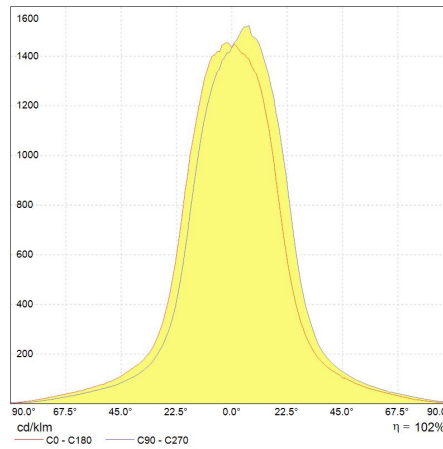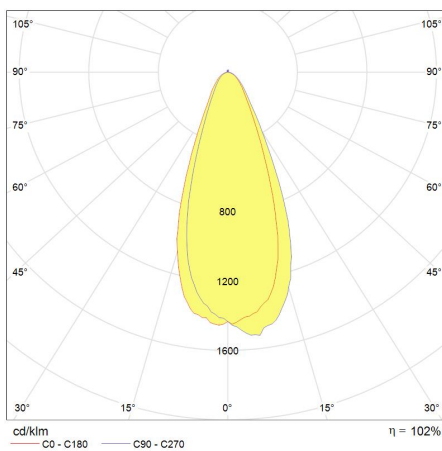

Lumen maintenance data

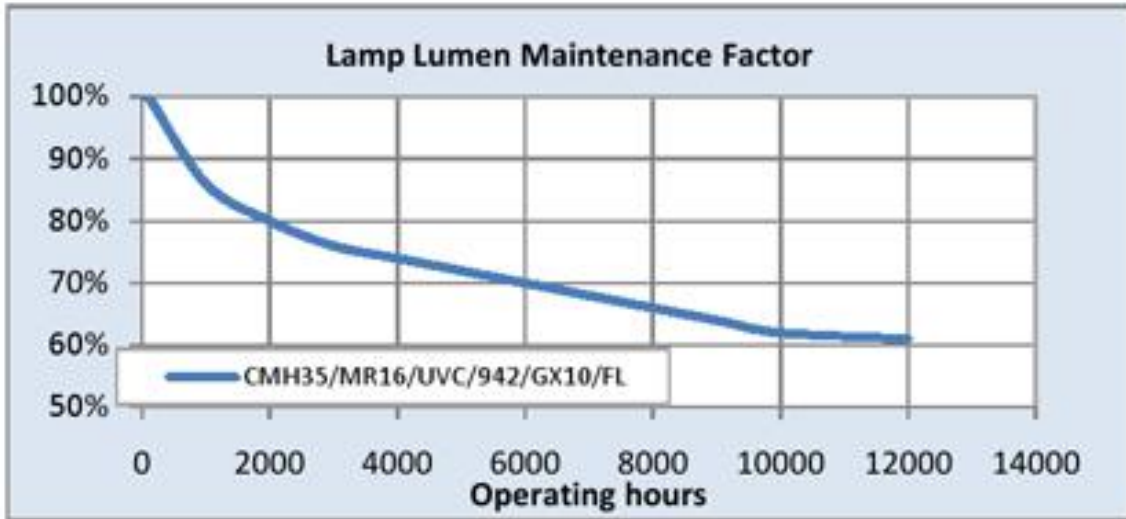

Survival data

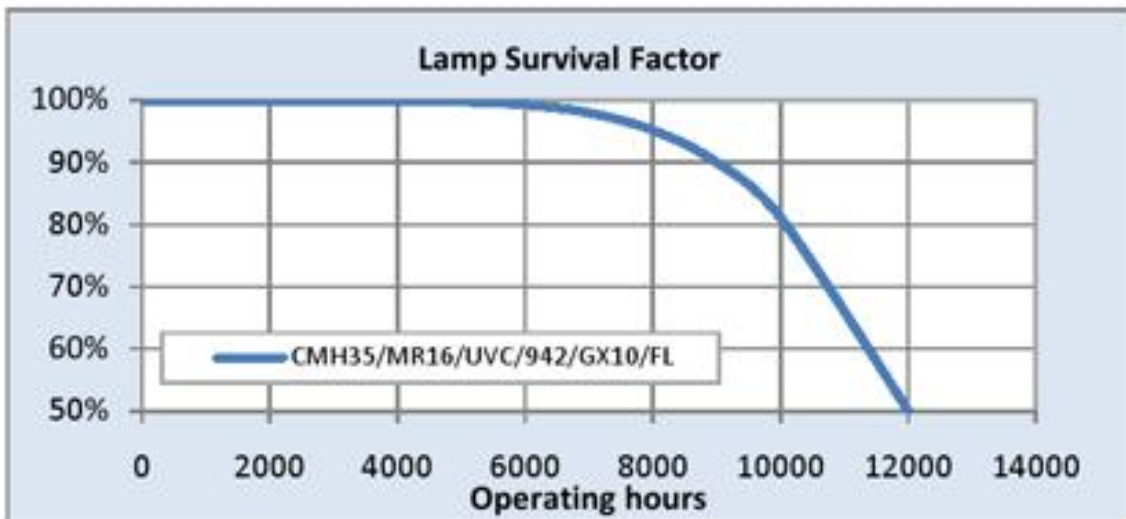

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Photometry \(IES\)](#)

[HID Lamps Spectrum Catalogue \(EN\) \(PDF\)](#)

[ConstantColor™ CMH Ultra Brochure \(PDF\)](#)

[ConstantColor™ White Light CMH Brochure \(PDF\)](#)

[ConstantColor™ CMH MR16 Data sheet \(PDF\)](#)

[CMH Product Safety Data Sheet \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)