

DB2002

2000 Series standard point detector base

General

The 2000 Series addressable diagnostic detectors provide extended features allowing for both ease of installation and maintenance. In addition, a comprehensive offering of I/O modules together with a full line of manual call points and bases are available.

Features you can use

When fitted with an exclusive 7-segment display, the detectors provide comprehensive on the spot information in addition to standard alarm signalling. Information such as device fault, pre-alarm, maintenance alarm, and test modes are provided. The detector can also display its address and real time analogue value on request.

All detectors are individually addressed by means of 2 rotary switches. The address is straight numerical and does not require binary or hex conversions, significantly reducing the risk of incorrect addressing.

Photoelectric detectors are equipped with a disposable optical chamber, allowing them to be serviced in the field. All detectors are compatible with a standard base, which makes them easily interchangeable.


Panel/device communication

This is provided through the powerful digital protocol, featuring multiple bus cycle codes and CRC error checking to ensure the correct analogue values are transported to the panel. The protocol ensures overall integrity and error free operation of the system.

Bases

In addition to the standard bases, the DB2016 isolator base is also available. A yellow LED on the DB2016 indicates a short circuit condition. The detector in the base will still receive power in the event of a single short circuit.

All bases are equipped with a moulded locking mechanism to prevent unauthorised removal of the detector head. To lock a detector in the base, simply remove a tab before inserting it into the base.

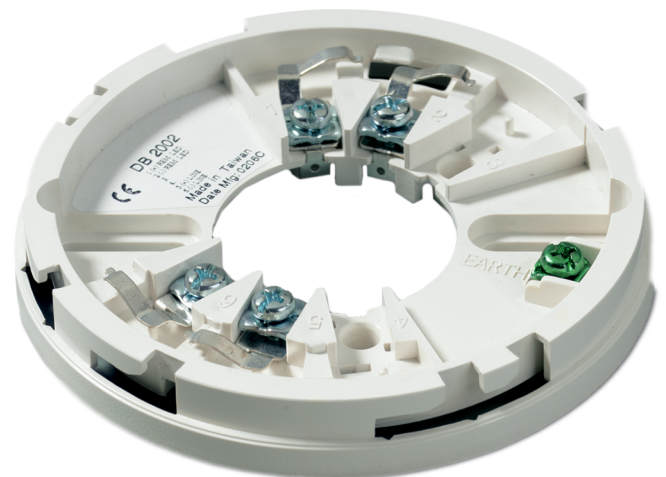

Details

- Suitable for 2000 series sensors
- Wide 10 cm base diameter
- 4 terminals for loop and remote indicator output

DB2002

2000 Series standard point detector base

Technical specifications

General

Compatibility	Aritech 2000 series point detectors
Connectivity	2-wire loop, earth & remote indicator

Electrical

No. of cable cores	2
Terminals	5

Physical

Physical dimensions	100 x 9 mm (Ø x H)
Net weight	38 g
Colour	Cloud white (RAL 9001)
Mounting type	Ceiling mount
Cable entries	1
Material (body)	Plastic

Environmental

Vandal proof	No
Operating temperature	-10 to +50°C
Storage temperature	-10 to +70°C
Relative humidity	10 to 95% noncondensing
Environment	Indoor

Regulatory

Compliancy	CE, REACH, RoHS 2, WEEE
------------	-------------------------

Compatible products

Category	Reference	Description
Detection device	DB2002U	2000 Series wide point detector base device
Detection device	DB2016	2000 Series base with isolator device
Detection device	DP2061N	Aritech 2000 Series addressable optical smoke detector
Detection device	DP2061T	Aritech 2000 Series addressable multisensor fire detector
Detection device	DT2063N	Aritech 2000 Series addressable heat detector
Notification device	AI672	Dx700 / Dx2000 series conventional remote indicator
Notification device	AS2368CAP-W	Aritech 2000 Series locking cap for 2000 series bases



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 28 September 2023 - 12:01